


Single Wall Isolation Booths

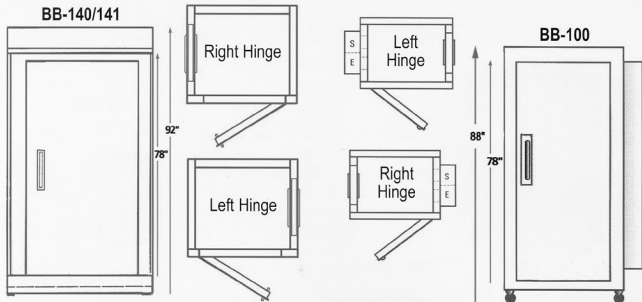

In stock for quick delivery!

Indicate model number and door hinge at time of order placement.

Model	Dimensions		Features		
	Inside (WxLxH)	Outside (WxLxH)	Ventilation	Lights	Weight
BB-140	3'4" x 3'0" x 6'6"	4'0" x 3'8" x 7'8"	100 CFM	1	1650
BB-141	4'0" x 3'4" x 6'6"	4'8" x 4'0" x 7'8"	100 CFM	1	1850
BB-100	34" x 26" x 78"	40" x 32" x 88"	100 CFM	1	1000

Acoustical Performance

Sound Absorption

Center Frequency Hz	125	250	500	1000	2000	4000	NRC
BB-140/141	0.79	1.08	1.10	1.02	1.04	1.00	1.05
BB-100	0.19	0.89	1.13	1.07	1.02	0.99	1.05

Sound absorption coefficients measured in accordance with ASTM C423-84a.

Noise Reduction

Center Frequency Hz	125	250	500	1000	2000	4000	NIC
BB-140/141	27	37	44	53	58	60	43
BB-100	19	30	38	43	49	54	40

Noise reduction from outside to inside of a properly installed booth in accordance with ASTM E-596



For more information, please contact:
 PO Box 3610 • Austin, TX 78764
 512-444-1961 • FAX: 512-444-2282
www.acousticsystems.com
info@acousticsystems.com